

Flat webbing sling

Webbing slings are made from high tenacity 100% polyester (PES) webbing material manufactured according to EN standards. These slings have the following advantages:

- Low weight, therefore offering easy handling
- Protection against hand injuries
- Protection against cargo surface damage
- Highly flexible and adaptable to given shapes
- UV-resistant, eliminating material ageing or brittlement
- Heat resistant up to 100°C
- Water - resistant fabric, preventing frost damage (down to -40°C)
- Colour coded as per latest EN standard
- Soft sewn eyes (Flat, Becket or Reverse eyes)
- Low elongation

Webbing sling ME type

These slings are constructed in a double layer type and have black lines on the face of the webbing. The number of black lines on the webbing indicates the safe working load of the sling


- High flexibility and ease of handling
- Wider webbing for the same tonnage
- Less abrasion due to wider area of contact
- Longer life due to less wear and tear



Flat slings are manufactured to EN 1492-1 safety factor of 7:1

Flat polyester sling type ME

(Webbing width in mm)

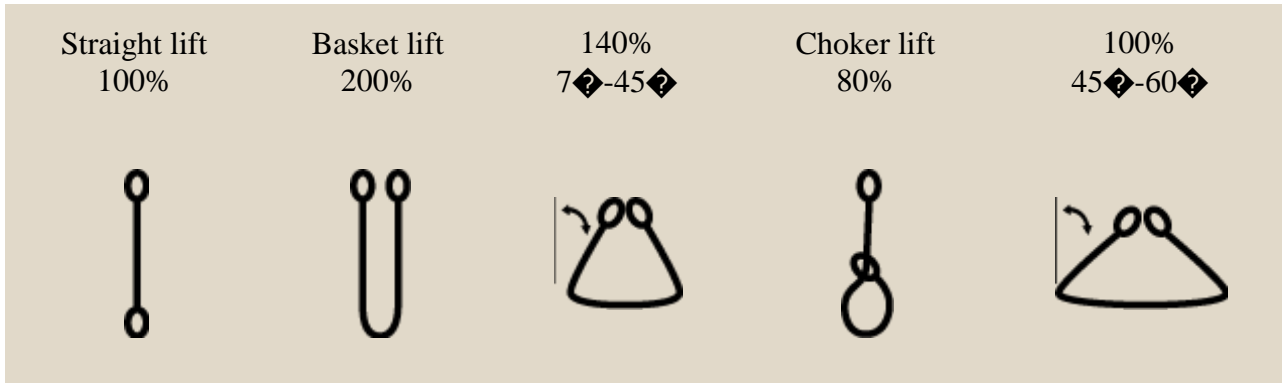

Ref	Colour	SWL/WLL	Width	SWL / WLL IN KG at different modes				
ME1	VIOLET	1T	30mm	1000	2000	1400	800	1000
ME2	GREEN	2T	60mm	2000	4000	2800	1600	2000
ME3	YELLOW	3T	90mm	3000	6000	4200	2400	3000
ME4	GREY	4T	120mm	4000	8000	5600	3200	4000
ME5	RED	5T	150mm	5000	10000	7000	4000	5000
ME6	BROWN	6T	180mm	6000	12000	8400	4800	6000
ME8	BLUE	8T	240mm	7000	16000	11200	6400	8000

