



Norm: EN10020



Stripping Tool IMS II - 1723 1




IMS II-Set - 1723 0

IMS II - Universal cable stripper for primary insulation

| | |
|-----------------------|--------------------------------|
| APPLICATION RANGE | Ø 15 - 52 mm |
| INSULATION THICKNESS | 0 - 15 mm |
| SUGGESTED APPLICATION | Any type of primary insulation |

Technical characteristics:

- Designed to remove the primary insulation of 6 to 45kV cables
- Helical and circular cuts
- Max. rotating diameter 220 mm
- Snap knob to activate/deactivate axial feed
- Positioned on the cable like a vice system
- Designed to strip both ends
- Unlimited stripping length
- Interchangeable blade

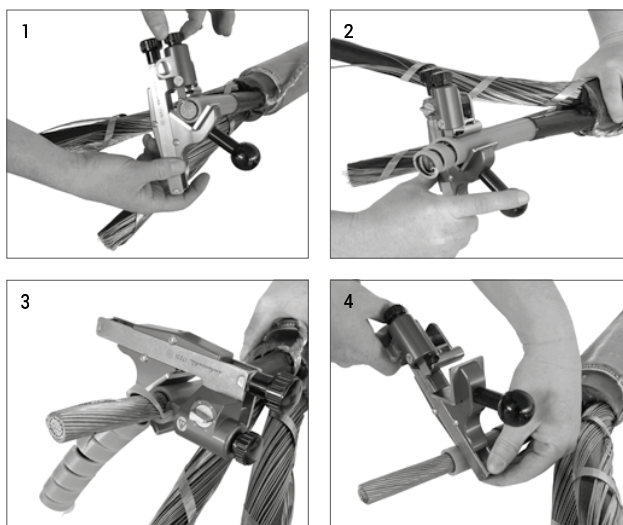

- REDUCED ROTATION ENABLES TO WORK ON LIMITED SPACE
- PERFECT CIRCULAR CUT
- NO INCISIONS ON SURFACE BELOW

| Description | Order No. | Dimensions | Weight |
|---|-----------|-------------------|--------|
| Set: IMS II | 17230 | 280 x 210 x 65 mm | 1,0 kg |
| Spare blade | 17232 | - | - |
| Spare parts kit (2x plates, 1x roll, suitable screws) | 17235 | - | - |

■ ATTENTION: NOT SUITABLE FOR WORK UNDER VOLTAGE!

Set equipment:

- IMS II - cable stripper 1723 1
- 2,5 mm Allen wrench 1710 0
- Tube of silicone grease AG1013
- Rigid resin case AB17230