


# CIRCLIP PLIERS

EGA Master manufactures a wide range of Circlip pliers with black and polished finishing, made of Chrome-vanadium special steel.

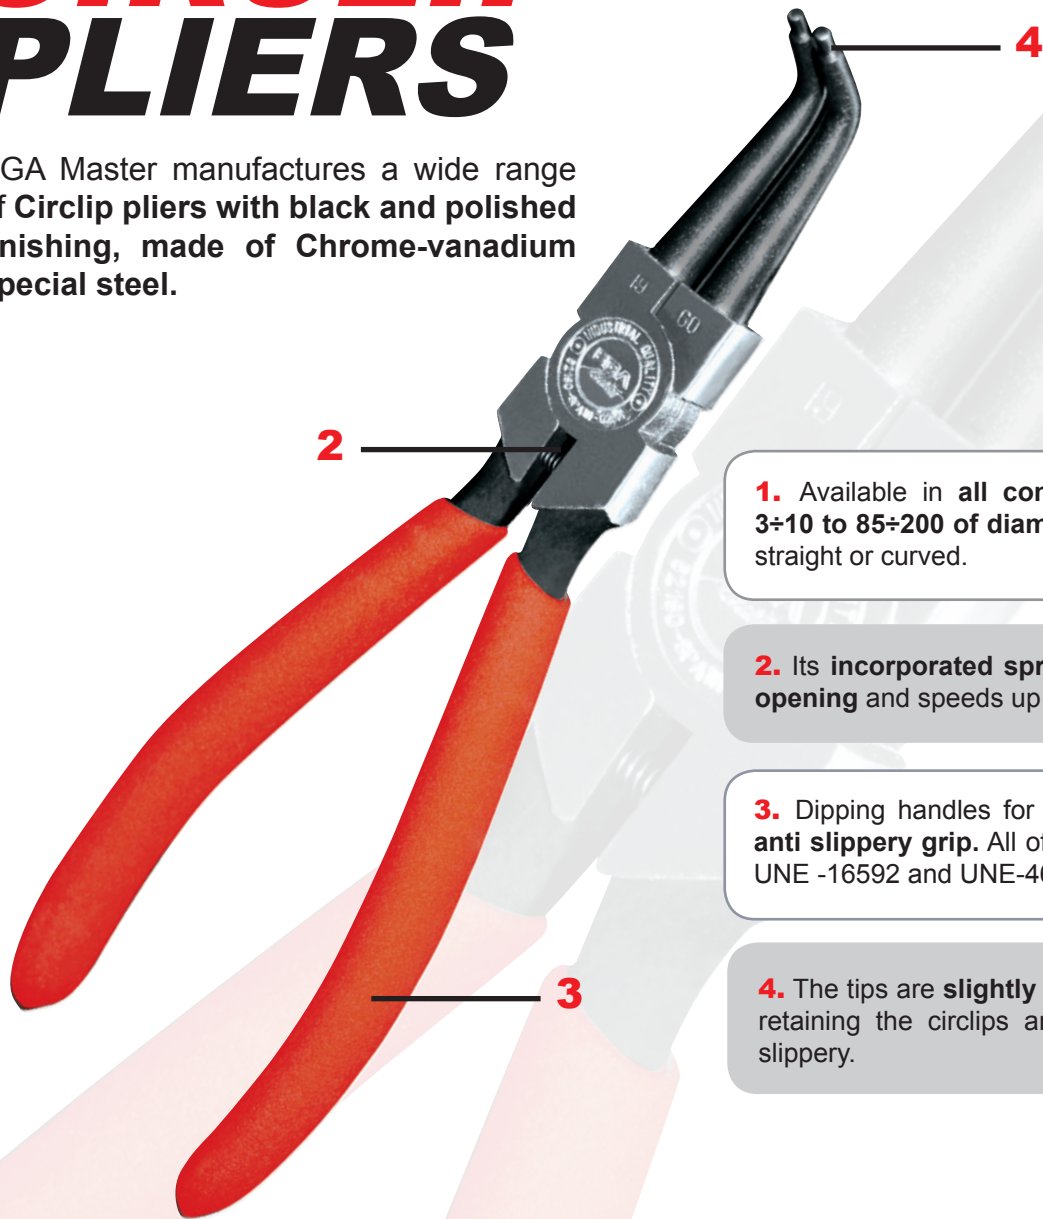


**1.** Available in all common sizes of washers. From 3÷10 to 85÷200 of diameter, both internal and external in straight or curved.

**2.** Its incorporated spring facilitates opening and speeds up the work.


**3.** Dipping handles for a guaranteed comfortable and anti slippery grip. All of them are made according to the UNE -16592 and UNE-46593 standards.

**4.** The tips are slightly inclined for retaining the circlips and to avoid slippery.

## EXTERNAL STRAIGHT

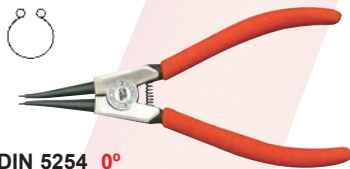

DIN 5254 0°

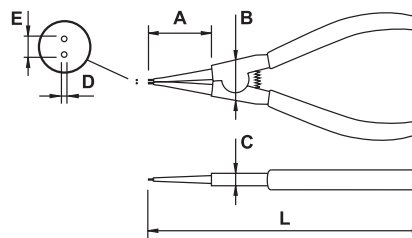


COD	L	A	B	C	D	E	mm	gr.		
62214	150	36	23	8,5	0,9	3,8	3÷10	105	6	6
62215				9,5	1,2	4,5	10÷25			
62183	175	43	25	11	2,4	5,5	19÷60	140	6	6
62216	230	55	29				40÷100			
62217	320	75	37	13	3,1	9,0	85÷200	470		-

**EXTERNAL BENT**




**DIN 5254 45°**

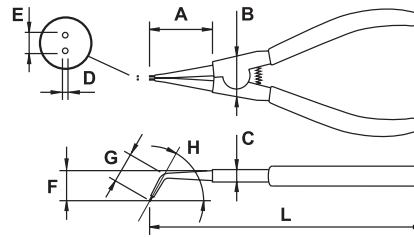


<b>COD</b>	<b>L</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>mm</b>	<b>gr.</b>	<b>mm</b>	<b>mm</b>
62218	145	30	22	8,5	0,9	4,5	14	15	50°	3+10	105	6	6
62219					1,3	5,0	15			10+25			
62182	170	37	25	9,5	1,8	7,0	18	18	90°	19+60	140	6	4
62220										28			
62221	300	49	37	14	3,2	9,5	34	30	90°	85+200	490	-	-

**INTERNAL STRAIGHT**

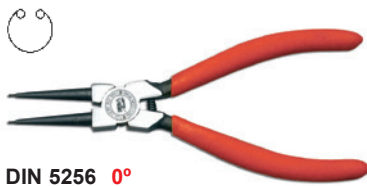

**DIN 5256 0°**

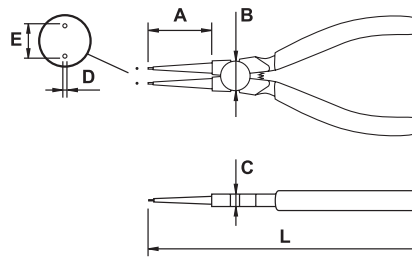


<b>COD</b>	<b>L</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>mm</b>	<b>gr.</b>	<b>mm</b>	<b>mm</b>
62222	150	36	16	8,5	1,2	17	8+13	100	6	6
62223					1,3	19	12+25			
62181	175	44	18	9,5	1,8	21	19+60	145	6	6
62224*	230	50	24	11	2,2	75	40+100	270	-	-
62225*	330	70	27	13	2,9	80	85+200	420	-	-

\*These models do not have spring for the confort of the user

**INTERNAL BENT**



**DIN 5256 45°**

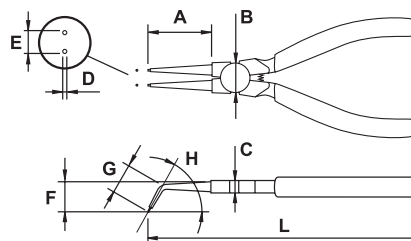

<b>COD</b>	<b>L</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>mm</b>	<b>gr.</b>	<b>mm</b>	<b>mm</b>
62226	150	28	16	9,0	1,3	15	16	15	50°	8+13	100	6	6
62227						16				12+25			
62180	170	33	18	10,0	1,7	16	20	17	50°	19+60	150	6	6
62228*	215	35	25	11	2,1	50	24	24	90°	40+100	270	-	-
62229*	300	48	28	13	3	75	33	33	90°	85+200	420	-	-

\*These models do not have spring for the confort of the user