

# HEAVY DUTY Aluminium




1. They are composed of **TITALUM®** special aluminium alloy, which makes the wrench **up to 50% lighter**.

2. TITALUM® alloy **provides extra resistance, exceeding the strictest standard GGG-W-651 E, Type II Class C** by more than 30%.

3. Electro Epoxy Powder painting for additional **resistance to shock and friction**.

4. **Month and year of manufacturing laser engraved** on the tool for proper traceability.


## ALUMINIUM PIPE WRENCH

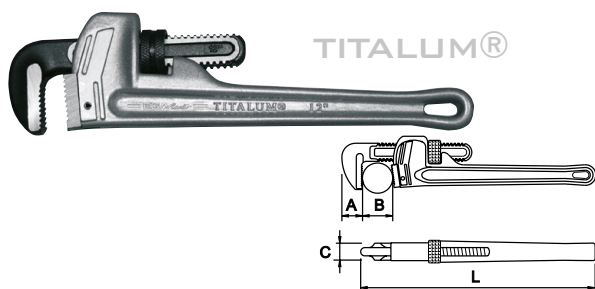

| COD   | L   | A  | B      | C  | Kg. |   |   |
|-------|-----|----|--------|----|-----|---|---|
| 61044 | 10" | 20 | 1.1/2" | 17 | 0,5 |   |   |
| 61023 | 12" | 23 |        | 20 | 0,8 | 6 | 1 |
| 61024 | 14" | 25 | 2"     | 23 | 0,9 | 3 |   |
| 61025 | 18" | 28 | 2.1/2" | 26 | 1,6 |   |   |
| 61026 | 24" | 33 | 3"     | 29 | 2,5 |   |   |
| 61027 | 36" | 43 | 5"     | 33 | 5,0 | 1 | - |
| 61028 | 48" | 55 | 6"     | 35 | 7,5 |   |   |

GGG-W-651-E, Type II Class C

## ALUMINIUM OFFSET PIPE WRENCH 90°

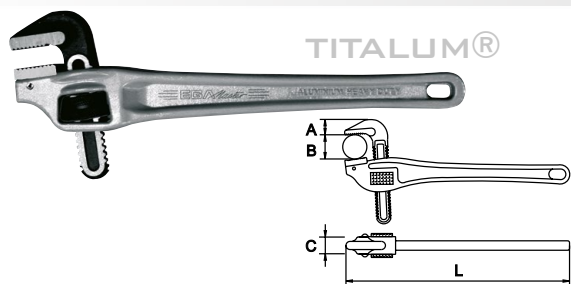

| COD   | L   | A  | B      | C  | Kg. |   |   |
|-------|-----|----|--------|----|-----|---|---|
| 61363 | 14" | 25 | 2"     | 28 | 0,8 | 6 | 1 |
| 61364 | 18" | 28 | 2.1/2" | 39 | 1,2 | 2 |   |
| 61365 | 24" | 34 | 3"     | 42 | 2,2 | 1 | - |

GGG-W-651-E, Type II Class C

# TECHNICAL SPECIFICATIONS

|           |                          |   |
|-----------|--------------------------|---|
| MATERIAL  | Handle                   | Cast aluminium alloy titalum®                           |
|           | Heel jaw                 | Steel alloy   |
|           | Movable jaw              | Forged steel  |
| HARDNESS  | Handle                   | 100-110Hb   |
|           | Heel jaw                 | 55-60 HRC   |
|           | Teeth of the movable jaw | 55-60 HRC   |
| FINISHING | Handle                   | Painted in grey color with metal powder semi-texturized |
|           | Heel & Movable jaw       | Black finished  |