




MM

COD.	A (mm)	B (mm)	HEX 1 (mm)	HEX 2 (mm)	Ø 1 (mm)	L (mm)	L1 (mm)	L2 (mm)			
66413	4	0,8	4	-	26	185	100	85	16		
66414	5,5	1	5	-	34	230	125	105	8		
66415	6,5	1,2	6	-	36	240		115		●	
66416	8			11		280	150				
66417	10	1,6	8			330	200		6		
66418	12	2			40			130			
66419	14	2,5	10	16		380	250			-	

| DIN ISO 2380 | Registered model

FEATURES

Hexagonal

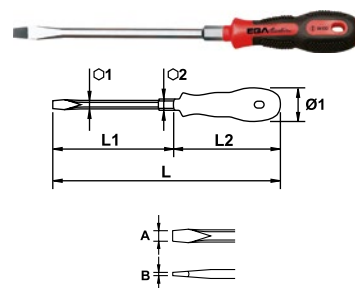


INCH

COD.	A (inch)	B (inch)	HEX 1 (mm)	HEX 2 (mm)	Ø 1 (mm)	L (mm)	L1 (inch)	L2 (mm)			
55344	5/32	0,032	4	-	26	185	4	85	16		
55345	7/32	0,04	5	-	34	230	5	105	8		
55346	1/4	0,046	6	-	36	240		115		●	
55347	5/16		8	11		280	6				
55348	25/64	0,063	8		40	330	8	130	6		
55349	15/32	0,08	10	16		380	10			-	

| DIN ISO 2380 | Registered model

FEATURES

Hexagonal

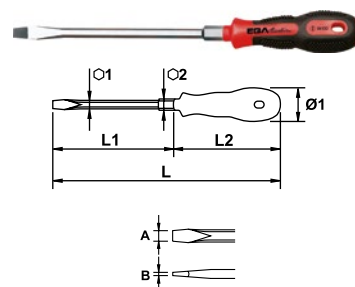


ELECTRICIAN

MM

COD.	A (mm)	B (mm)	Ø 1 (mm)	Ø 2 (mm)	L (mm)	L1 (mm)	L2 (mm)				
66420	2,5	0,4	2,5		160	75					
66421					145	60					
66422	3	0,5	3	26	185	100	85	16		●	Yellow
67226					285	200					
66428	3,5	0,6	3,5		185	100					
66423					230	125					
66424	4	0,8	4		255	150			●	Green	
66411				34	405	300	105	8			
66425	5,5	1	5,5		255	150					
66412					405	300					
66426	6,5	1,2	6,5	36	265	150					
67259					315	200	115	6			
66427	8		8	40	305	175	130			-	

| DIN ISO 2380 | Registered model

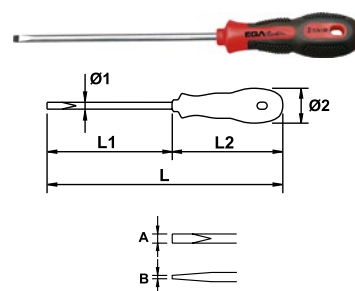

NON-SLIP antislippery magnetic tip