

SWEDISH PIPE WRENCHES



EGA Master Swedish Pipe Wrenches SERIE MASTER Cr-V are manufactured with a chrome vanadium alloy and fulfill the DIN 5234 standard. They are totally forged.



Registered models

1. Thanks to its exterior design, they are perfect for use in places with difficult access.

2. The jaws design and the teeth orientation provide an ideal grip of the pipe.


3. The soft foam coated handles provide a great and comfortable use.

4. Registered models.

SWEDISH PIPE WRENCH S 45°



Registered model

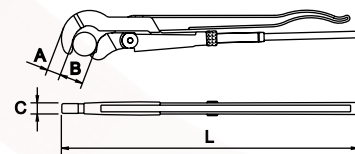


COD	A	B	C	L mm	Kg.		
61010	15	1/2"	8,8	230	0,4	4	1
61011	20	1"	13	330	0,8	6	
61012	26	1.1/2"	14	420	1,4	4	
61013	28	2"	16	550	2,4		-
61022	35	3"	19	650	4,2	2	

Cr-V DIN 5234

SWEDISH PIPE WRENCH 45°




Registered model

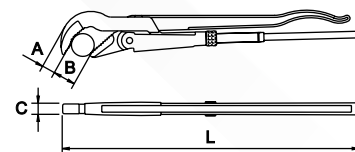

COD	A	B	C	L mm	Kg.		
61040	18	1/2"	8,8	230	0,4	4	1
61041	24	1"	13	330	0,7	6	
61042	27	1.1/2"	14	450	1,4	4	
61043	33	2"	16	550	2,3	2	-

Cr-V DIN 5234

SWEDISH PIPE WRENCH 90°

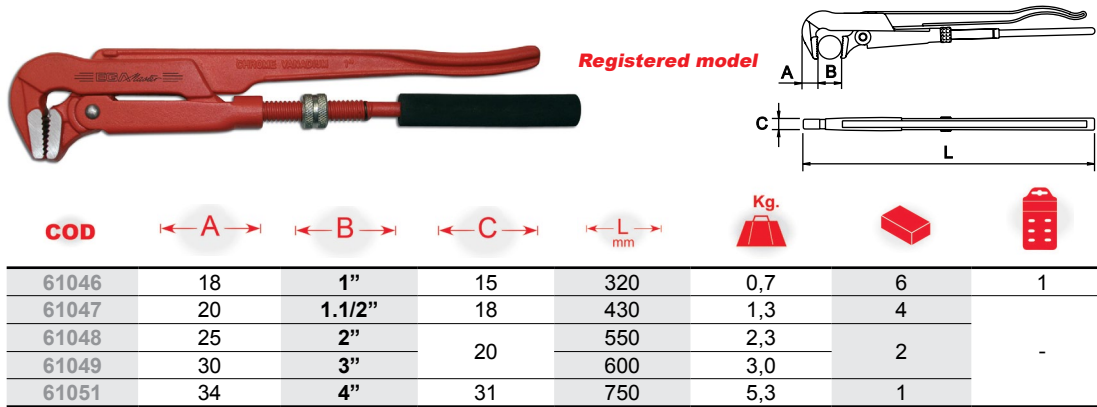


COD	A	B	C	L mm	Kg.			
61046	18	1"	15	320	0,7	6	1	
61047	20	1.1/2"	18	430	1,3	4		
61048	25	2"	20	550	2,3			
61049	30	3"	20	600	3,0	2		-
61051	34	4"	31	750	5,3	1		

Cr-V DIN 5234

TECHNICAL SPECIFICATIONS

MATERIAL	General	Chrome-vanadium
	Handle	Soft foam grip
HARDNESS	General	Female: 33-40HRc / Male: 38-45 HRc
	Teeth	50-55 HRc
	Nut	40-45 HRc
FINISHING	Painted in EPOXI powder red color RAL-2002 semi-texturized	

FITTINGS WRENCH

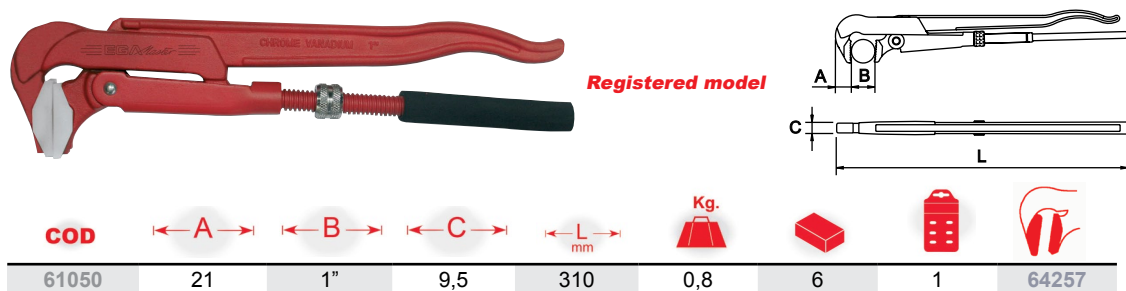

COD	A	B	C	L mm	Kg.				
61050	21	1"	9,5	310	0,8	6	1		64257

Cr-V DIN 5234

TECHNICAL SPECIFICATIONS

MATERIAL	General	Chrome-vanadium
	Handle	Soft foam grip
	Jaws	Plastic
HARDNESS	General	Female: 33-40HRc / Male: 38-45 HRc
	Nut	40-45 HRc
FINISHING	Painted in EPOXI powder red color RAL-2002 semi-texturized	