

SLOGGING OPEN WRENCHES



EGA Master's slogging open wrenches are designed for tightening and loosening large nuts and bolts with hammer or mallet in heavy industries, ship building, maintenance of industrial plants...etc




1. Allows loosening and tightening screws and nuts by hitting the bottom of the handle.



2. Suitable to be used with hammer or mallet.

3. Made of special steel.

SLOGGING OPEN WRENCHES MM

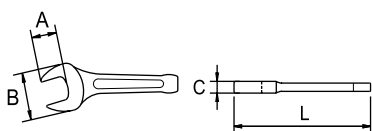

COD.	AF mm	L (mm)	A (mm)	B (mm)	C (mm)	Kg		
67423	17	125	19	41		0,1		
67424	19							
67425	21	135	22	46	12	0,2		
67426	22							
60871	24	150	24	50			5	•
60903	26	175	27	60	15	0,4		
60872	27							
60873	30	190	30	65	16	0,6		
60874	32		32					
67427	34	200	34	70	17	0,7		
60875	36	210	36	75		0,8		
67428	38	220	38	80	18	0,9	1	-
60876	41	230	41	90				
60877	46	250	46	100	20	1,5		

COD.		L (mm)	A (mm)	B (mm)	C (mm)			
60878	50	280	50	110	21			
67563	52							
67435	54	305		117		2		
60879	55	300	55	120	23			
67436	56	305		117				
60880	60	320	60	130		3		
60927	65	340	65	140				
61283	67	335	67		28			
61284	68		68			5		
60928	70	370	70		29			
61285	71		71	160	30			
61286	72		72					
60929	75	380	75		29	6		
60930	80					7		
60931	85	400	85	175	32			
60932	90					10		
60933	95	450	95	195	36	11		
60934	100							
60935	105	490	105		43	14		
60936	110			230			1	-
60937	115	500	115		45			
60938	120							
67429	125		125	250		19		
67430	130	550			50			
67431	135		135	270				
67432	140							
67433	145	650	145	290	55	24		
67434	150		150					
57050	155							
57051	160	645	160	310	60	27		
57052	165							
57053	170	705	170	330	65	30		
57054	175							
57055	180	720	180	350		33		
57056	185							
57057	190	755	190	370		39		
57058	195				70	46		
57059	200	760	200	390		50		

DIN 133

TECHNICAL SPECIFICATIONS	
MATERIAL	Special steel
HARDNESS	From 17mm to 46mm 34-40 HRC
	From 50mm to 200mm 30-36 HRC
FINISHING	Painted in epoxi powder matt black color semi-texturized