

# Dräger X-plore® 1300



The Dräger X-plore® 1300 — developed on the basis of market demands and customer requirements — sets new standards on comfort levels for filtering facepiece respirators. the result: an extremely comfortable, pre-formed dust mask for protection against solid and liquid particles. its efficient filter material and ergonomic design make the Dräger X-plore® 1300 a disposable dust mask with maximum comfort, safety and user acceptance.

### YOUR BENEFITS

- High level of wearer comfort through ergonomic shape and advanced filter media.
- Safety according to your needs —
   a color coded selection of protection
   levels and design variations, makes
   it easy to distinguish between
   protection classes.
- Ergonomic design allows the mask to fit well with safety glasses and goggles. A special seal in the area of the nose helps prevent fogging.
- Versions with an integrated Odor Control layer keep nuisance OV odors out.
- Integrated strap tension adjuster to allow the wearer to fine tune the mask to the proper comfort.
- A sure fit, for the most demanding conditions - the Dräger X-plore 1300° is available in two sizes (S/M and M/L).



Dräger X-plore® 1300

# The ideal combination: comfort and safety.

### Comfort nose pad

The ergonomic shape and the comfort nose pad provides additional sealing protection for various facial shapes. The Dräger X-plore® 1360 offers even more comfort and safety with its extra wide nose sealing pad.

### Advanced filter media

The multi-layer high-performance filter material, available in two protective levels offers a superior level of filtration efficiency. Additionally, available is an Odor Control version to filter out nuisance organic vapor odors.

### Comfort valve

The optional climate control comfort valve reduces breathing resistance and heat build-up inside the mask.

Highly elastic textile harness
The highly elastic "continuous looped" textile harness enables easy donning and doffing without pulling on his/her hair. All variations offer a unique strap tension adjuster to allow the user to comfortably secure the mask against their face.

### Plastic coated nose clip

Fits and seals securely – plastic coating eliminates sharp edges.

### Color coding

Nose clip and comfort exhalation valve are color coded according to the protection class.


### Size

All variations of the Draeger X-plore® 1300 are available in two sizes, S/M and M/L.





## Take a deep breath.

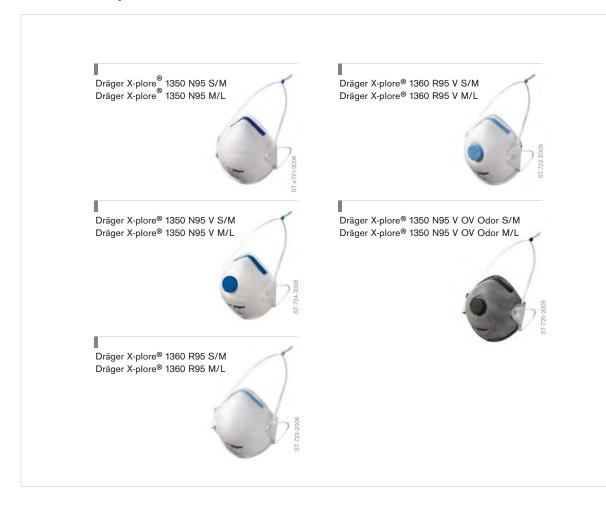

# 4006 | PI | September 19, 2008 | Marketing Communications | subject to modification.

### TECHNICAL DATA

Head harness	Synthetic elastics Plastic-coated metal wire	
Nosepiece		
Filter media	Synthetic filter media	
Exhalation valve (V-models)	Polyamid/Rubber	
Approvals	NIOSH TC	

### ORDER INFORMATION

Protection Class	Size	Pieces per Box	Order No
Dräger X-plore® 1350 N95	S/M	20	39 51 220
Dräger X-plore® 1350 N95	M/L	20	39 51 230
Dräger X-plore® 1350 N95 V	S/M	10	39 51 221
Dräger X-plore® 1350 N95 V	M/L	10	39 51 231
Dräger X-plore® 1360 R95	S/M	20	39 51 225
Dräger X-plore® 1360 R95	M/L	20	39 51 235
Dräger X-plore® 1360 R95 V	S/M	10	39 51 226
Dräger X-plore® 1360 R95 V	M/L	10	39 51 236
Dräger X-plore® 1350 N95 V OV Odor¹	S/M	10	39 51 222
Dräger X-plore® 1350 N95 V OV Odor¹	M/L	10	39 51 232

<sup>&</sup>lt;sup>1</sup>Additionally against nuisance odors below permissible exposure limit (PEL).

Draeger Safety, Inc. 101 Technology Drive Pittsburgh, PA 15275-1057 USA Tel +1 412 787 8383

Fax +1 412 787 2207 www.draeger.com

CUSTOMER SERVICE Tel +1 800 858 1737 Fax +1-800 922 5519

TECHNICAL SERVICES Tel +1 888 794 3806 Fax +1 888 794 3807

CANADA

Draeger Canada Ltd. 7555 Danbro Crescent Mississauga, ON L5N-6P9 Canada Tel +1 905 821 8988

Fax +1 905 821 2565 CUSTOMER SERVICE

Tel +1 877 372 4371 Fax +1 800 Fax Tube

Draeger Safety S.A. de C.V. Av. Peñuelas No. 5 Bodega No. 37 Fraccionamiento Industrial San Pedrito Queretaro, Qro. C.P. 76148

Mexico Tel +1 52 442 246 1113 Fax +1 52 442 246 1114

**GERMANY** 

Dräger Safety AG & Co. KGaA Revalstrasse 1 23560 Lübeck, Germany Tel +1 49 451 882-0 Fax +1 49 451 882-2080