

Scarifier



Applications

Our scarifiers are widely used in traffic line and marking removal, concrete and coating removal, sidewalk trip hazard repair, floor cleaning or preparation, making non-slip surface, concrete joint and uneven and so on.

Features


1. Durable 12PK belt



2. High efficiency double NSK bearing




3. Replace the drum assembly only in 5 minutes

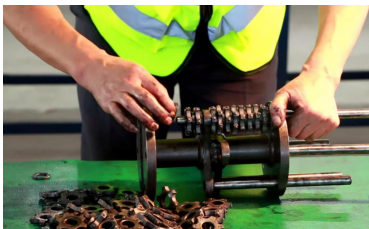

4. Adjustable milling depth



5. Dust control brushes equipped

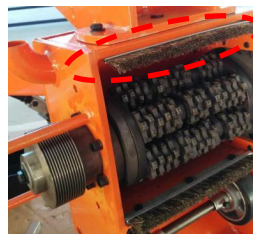

6. Adjustable handle with shock absorption




7. A central crane hook for easier lift and transport



8. Strong PU wheels ensure horizontal work



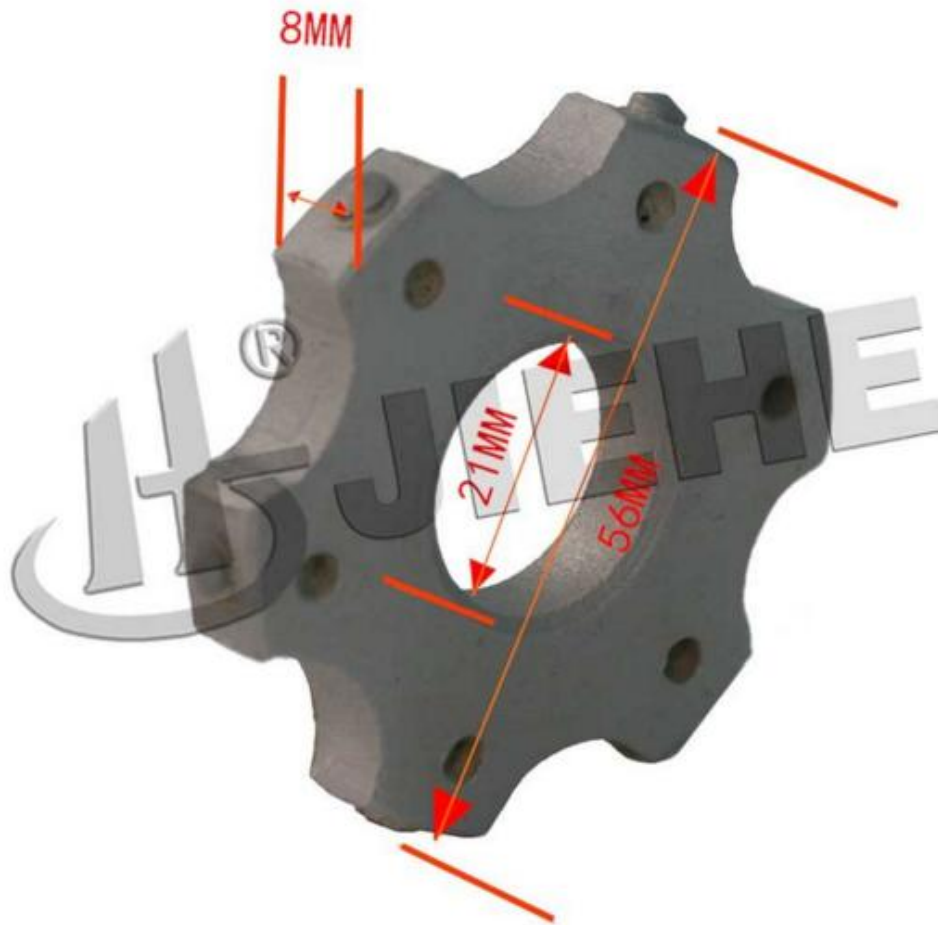

9: The service life of cutters are **5000-7000Sqm** , but others just **2500-3000Sqm**
 CONCRETE SCARIFIER :

JHE200: <https://www.youtube.com/watch?v=F1ASdoHKUvA>

JHE280: <https://www.youtube.com/watch?v=gL4G7HcatCM>

JHE280: https://www.youtube.com/watch?v=FU_Q8ABeP

JHE250: <https://www.youtube.com/watch?v=9Qf5DiiQCUE>

JHE250E: <https://www.youtube.com/watch?v=ahpKmoSgIFE&feature=share>

Concrete scarifier can match different engine , now Honda engine for your reference

Specifications

Model	JHE-200	JHE-250	JHE-280
Power	Honda GX270 petrol 9 hp	Honda GX390 petrol 13 hp	Honda petrol 25 hp
Working width	8"/200 mm	10"/250 mm	11"/280 mm
Working depth	0.2"/3-5 mm	0.4"/5-10 mm	0.6"/5-15 mm
Shaft QTY	6 pieces	6 pieces	6 pieces
Cutter QTY	90 pieces	90 pieces	110 pieces
Working rate	30~50 m ² /h	25-50 m ² /h	40-70 m ² /h
Net weight	105 kg	178 kg	306 kg
Demensions	820*490*810 mm	990*550*980 mm	1380*720*1010 mm
Power drive	Manual		
Drum Rotation	Clock wise cut down		
Milling mode	Downward cut		
Depth Control	Adjustable		
Opitional power	Siemens motor 4 kW: 116 kg CC. 178F diesel engine 7 hp: 119 kg	Siemens motor 5.5/7.5 kW: 201 kg CC. 186F diesel engine 10 hp: 119 kg	Kohler petrol 25 hp: 306 kg Siemens 11 kw: 339 kg

EVERY YOUR MACHINE HAVE PRODUCTION&DELIVERY BEFORE SHIPPING

Eg.

Those pics will be provided before delivery.



-All products and spare parts being packaged.



-How to package



DELIVERY INFORMATION

CHANGZHOU JIHE MACHINERY CO.,LTD. NO.1 QINDUEN INDUSTRIAL ZONE CHANGZHOU, JIANGSU PROVINCE TEL: +86-512-85000000 FAX: +86-512-85000000									
Delivery Information									
B/P (PLB):				P/I NO.: 					
ATTN:				DATE: 2017-05-09 Terms of Delivery: FOB Shanghai (LCL)					
Carton No.	DESCRIPTION	PCS	PKGS	Total Weight Gross KG	Total Weight Net KG	CBM	Serial Numbers		
1-9	SCARIFYING MACHINE, Model: SPM-200E (6.9KW) Engine: 40x380x50x42, Three Phase, SIEMENS	1					1705127		
	Drum only for SPM-200E	1	1	154	142	0.48			
	Shafts for SPM-200E	6							
	Cutters for SPM-200E	93							
	Spacers for SPM-200E	93							
2-4	SCARIFYING MACHINE, Model: SPM-200E (6.9KW) Engine: 40x380x50x42, Three Phase, SIEMENS	1	1	139	127	0.48	1705128		
3-4	SCARIFYING MACHINE, Model: SPM-200E (6.9KW) Engine: 40x380x50x42, Three Phase, SIEMENS	1	1	139	127	0.48	1705129		
4-9	Scarifying Machine SPM-250E: 6 / 90, No shock absorber, MOTOR: 5.5KW, 380V, 50HZ, SIEMENS	1					1705118		
	Drum only for SPM-250E	1							
	Shafts for SPM-250E	6	1	214	200	0.59			
	Cutters for SPM-250E	93							
	Spacers for SPM-250E	93							
5-4	Scarifying Machine SPM-250E: 6 / 90, No shock absorber, MOTOR: 5.5KW, 380V, 50HZ, SIEMENS	1	1	190	176	0.59	1705119		
6-4	Scarifying Machine SPM-250E: 6 / 90, No shock absorber, MOTOR: 5.5KW, 380V, 50HZ, SIEMENS	1	1	190	176	0.59	1705120		
Total:		380	6	1,026	948	3.21			
NOTE: The delivery photos as follows (More photos as attached):									
SCARIFYING MACHINE SPM-200E 									



2017 New design : have some price with common model

NEW DESIGN

12CM(4.7INCH) HIGHER



QUALITY CONTROL

铤刨机检验报告 SCARIFIER INSPECTION REPORT

产品型号 Model:

产品编号 Model Number:

类别 Catagory	要求 Requirement	结果 Result ✓/✗
结构 Structure	皮带轮直径 Pulley diameter	
	皮带是否倾斜 Belt in the proper position	
	皮带涨紧,用手按抓后略有回 Belts are tighted,a slight rebound by hand after grasping	
	锁紧位置得当,当手柄旋转至最高位置时测量刀片最低点离地不得小于 2 毫米 The locking position is appropriate, when the handle is rotated to the highest position,measuring the distance lowest point of the carbide cutters from the floor which shall not be less than 2 mm	
	铤鼓正反转正常 Drum sets rotating in 2 directions smoothly	
	油门/油门线能灵活控制,不脱落不折线 The throttle line working well,not loose and folded	
	油门调速与转速需吻合匹配 The throttle controlling match the engine speed	
	四轮置工装检验平台校正,无明显摇曳 No obvious shaking as four wheels of a machine rolling on the operating platform	
	轴承加注黄油 Bearings is lubricated	
	手轮转动灵活 Handles rotating smoothly	
	油门卡片安装 The throttle blocking pad is intalled	
	紧固件牢固 All fastening pieces are tighted properly	
	刀片良好,刀头无脱落 Carbide cutters in good condition	
外观 Apperance	产品外观,外部零部件表面清洁,无污渍,无锈 The product appearance,external parts are clean,no stains,no rust	
	无色差,漏喷漆,划伤 No color difference,unpainted area,scratches	
商标 Logo	商标标识,完整清晰,位置正确 Clear logos and stucked well.	
铭牌 NamePlate	铭牌清晰,位置正确 Clear name plate at the proper position.	
标签 Labels	标签完整清晰,位置正确 Clear labels at the proper position.	
包装 Package	包装符合合同 Be packaged according to the contract	
发动机动力 Engine&power	发动机动符合合同 Engine and power according to the contract	
资料 Documents	说明书,工具包 Tool bags users' manau	
备注 Comments:		
符合出厂标准 Meets the factory standard:		

是 YES ☐ / 否 NO ☐

检验员 Inspector Signature:

日期 Date: