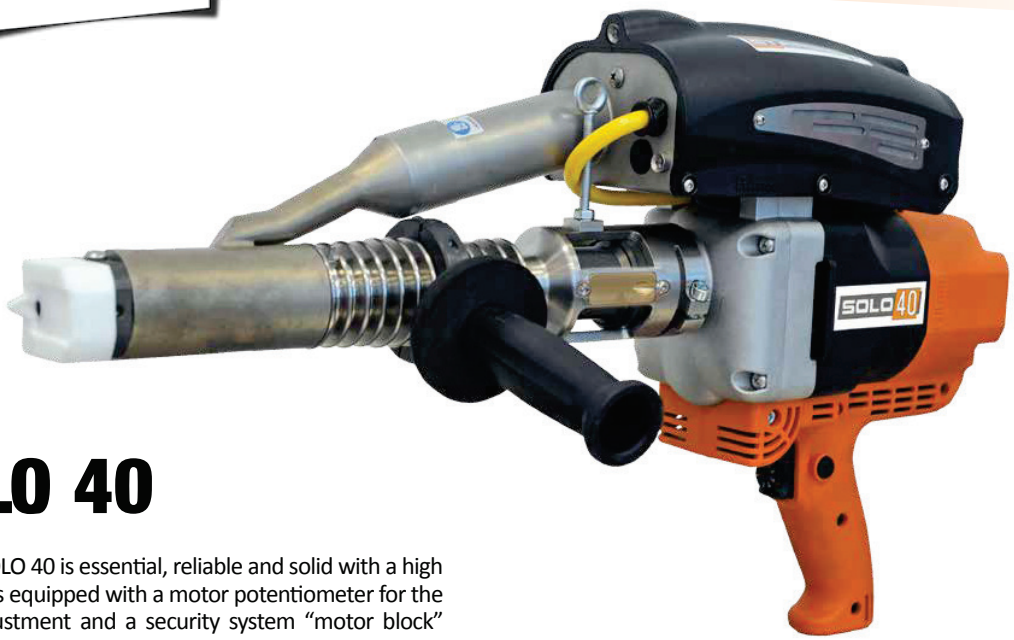


SOLO 40

Stargun SOLO 40 is essential, reliable and solid with a high output; it is equipped with a motor potentiometer for the speed adjustment and a security system “motor block” to prevent cold starts. The temperature control is on the blower and can be set on the control panel.

- Backlight Display
- Double LEDs for the lightening of the welding area
- Potentiometer; security system “motor block/cold start”
- Single T° thermoregulator: air
- Rotating handle
- 360° rotating welding shoes. Easily replaceable.

Standard equipment:
SOLO 40, transport case and extruder support;
- Rotating welding shoe mod. 90° - a 10,5 mm cod. 86777823
- Rotating welding shoe mod. V Flat - 15 mm 86777831


On request
Welding shoes, KIT geotextiles

Materials	HDPE, PP
Rods	Ø 4 - 5 mm
Sheets	1,5 ÷ 30 mm
* Output up to	4 Kg/h HDPE rod Ø 5 mm
Dimensions	550 x 310 x 100 mm
Power supply	230 Vac 50/60 Hz
Total absorbed power	3300 W
Weight	7,6 Kg

* The output varies depending on the material



Nozzle for corrugated pipes
76777840



Special welding shoe support
45° - 80047830 (only support)
90° - 80047820 (only support)




Special nozzle 180 mm
86777800

WELDING SHOES 40




90° - Welding




360° ROTATING SHOES		
Model	**Sheet thickness**	**Article**
90° - a 5.6 mm	**8 mm**	**86777820**
90° - a 7 mm	**10 mm**	**86777821**
90° - a 8,4 mm	**12 mm**	**86777822**
90° - a 10,5 mm	**15 mm**	**86777823**
90° - a 14 mm	**20 mm**	**86777824**
90° - a 17,5 mm	**25 mm**	**86777825**
90° - a 21 mm	**30 mm**	**86777826**

V - Welding



X - Welding



360° ROTATING SHOES			
Model	**V welding "S"**	**X welding "S"**	**Article**
V Flat - 8	**8 mm**	**16 mm**	**86777829**
V Flat - 10/12	**10 - 12 mm**	**20 - 25 mm**	**86777830**
V Flat - 15	**15 mm**	**30 mm**	**86777831**
V Flat - 20	**20 mm**	**40 mm**	**86777832**



Conical 20
86777817

Conical 14
86777818

Geotextile
86777814