


# PLIERS FOR INSULATED TERMINALS



EGA Master offers a wide range of crimping pliers for insulated terminals, such as: pliers for insulated and non-insulated terminals, telephone, cable links insulated and non-insulated and coax-BNG-TNC.



**1.** Ideal for basic functions for connections.

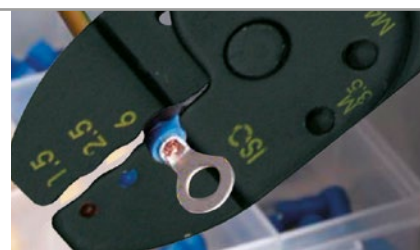

**2.** Its multifunction permits it to be used to strip and join cables, crimping terminals, crimping connectors, etc.

**3.** Ergonomic handles.

## FOR INSULATED TERMINALS

| COD.         | L (mm)   | AWG                  | (mm)                                 | CAP. (mm <sup>2</sup> )             | DIN (mm <sup>2</sup> ) |     |   |   |  |
|--------------|----------|----------------------|--------------------------------------|-------------------------------------|------------------------|-----|---|---|--|
| <b>62493</b> | 200      | 10-12-14-16-18-20-22 | 2,59-2,05-1,63-1,29-1,02-0,812-0,644 | 5,26-3,31-2,08-1,31-0,82-0,52-0,324 | 6-4-2,5-1,5-1-0,75-0,5 | 175 | 6 | • |  |
| COD.         | L (inch) | AWG                  | (mm)                                 | CAP. (mm <sup>2</sup> )             | DIN (mm <sup>2</sup> ) |     |   |   |  |
| <b>62591</b> | 9        | 22-10                | 0,644-2,59                           | 0,324-5,26                          | 0,5-6                  | 550 | 6 | • |  |



## FOR CABLE LINKS INSULATED & NO INSULATED

| COD.         | L (mm) | AWG                  | (mm)                                 | CAP. (mm2)                          | DIN (mm2)              |     |   |   |  |
|--------------|--------|----------------------|--------------------------------------|-------------------------------------|------------------------|-----|---|---|--|
| <b>62494</b> | 220    | 10-12-14-16-18-20-22 | 2,59-2,05-1,63-1,29-1,02-0,812-0,644 | 5,26-3,31-2,08-1,31-0,82-0,52-0,324 | 6-4-2,5-1,5-1-0,75-0,5 | 190 | 6 | ● |  |



| COD.         | L (inch) | AWG   | (mm)       | CAP. (mm2) | DIN (mm2) |     |   |   |  |
|--------------|----------|-------|------------|------------|-----------|-----|---|---|--|
| <b>62594</b> | 7.1/2    | 26-14 | 0,405-1,63 | 0,129-2,08 | 0,5-2,5   | 360 | 6 | ● |  |



## FOR NOT INSULATED TERMINALS

| COD.         | L (inch) | AWG            | (mm)                       | CAP. (mm2)                | DIN (mm2)          |     |   |   |  |
|--------------|----------|----------------|----------------------------|---------------------------|--------------------|-----|---|---|--|
| <b>62593</b> | 7.1/2    | 22-20-18-16-14 | 0,644-0,812-1,02-1,29-1,63 | 0,324-0,52-0,82-1,31-2,08 | 0,5-0,76-1-1,5-2,5 | 350 | 6 | ● |  |



## FOR COLOR INSULATED TERMINALS

| COD.         | L (inch) | AWG            | (mm)                       | CAP. (mm2)                | DIN (mm2)          |     |   |   |  |
|--------------|----------|----------------|----------------------------|---------------------------|--------------------|-----|---|---|--|
| <b>62592</b> | 7.1/2    | 22-20-18-16-14 | 0,644-0,812-1,02-1,29-1,63 | 0,324-0,52-0,82-1,31-2,08 | 0,5-0,75-1-1,5-2,5 | 350 | 6 | ● |  |



## FOR COAX-BNC-TNC CONNECTORS

| COD.         | L (inch) | CAP.                                                                          |     |   |   |  |
|--------------|----------|-------------------------------------------------------------------------------|-----|---|---|--|
| <b>62597</b> | 9        | 58, 59, 62, 8X   140, 141, 174   210, 223, 303, 400   FIBER OPTIC BELDEN 8279 | 550 | 6 | ● |  |



## FOR PHONE TERMINALS

| COD.         | L (inch) | CAP.                                                               |     |   |   |  |
|--------------|----------|--------------------------------------------------------------------|-----|---|---|--|
| <b>62595</b> | 8        | 4P2C, 4P4C, 6P4C (RJ-11), 6P6C (RJ-12), 8P8C, 10P6C, 10P8C (RJ-45) | 500 | 6 | ● |  |



| COD.         | L (inch) | CAP.                             |     |   |   |  |
|--------------|----------|----------------------------------|-----|---|---|--|
| <b>62596</b> | 7.1/2    | 6P4C, 6P6C (RJ-11), 8P8C (RJ-45) | 260 | 6 | ● |  |

### TECHNICAL SPECIFICATIONS

|           |               |                     |
|-----------|---------------|---------------------|
| MATERIAL  | Body          | Special steel       |
|           | Jaws          | Chromium-molybdenum |
|           | Handles       | PVC                 |
| HARDNESS  | Jaws          | 38-42 HRc           |
| FINISHING | Body and jaws | Black finishing     |
|           | Handles       | Red colour RAL-2002 |