


EXTERNAL BENT




DIN 5254 45°

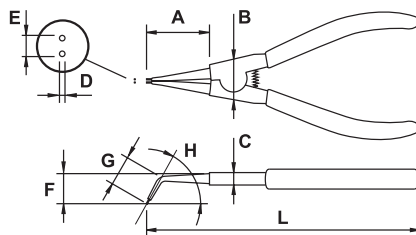


COD	L	A	B	C	D	E	F	G	H	mm	gr.		
62218	145	30	22	8,5	0,9	4,5	14	15	50°	3÷10	105	6	6
62219					1,3	5,0	15			10÷25			
62182	170	37	25	9,5	1,8	7,0	18	18	90°	19÷60	140	6	4
62220	210		28	11	2,2		24	20		40÷100	280		
62221	300	49	37	14	3,2	9,5	34	30		85÷200	490		

INTERNAL STRAIGHT

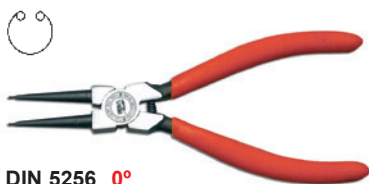

DIN 5256 0°

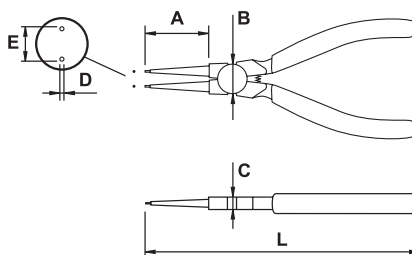


COD	L	A	B	C	D	E	mm	gr.			
62222	150	36	16	8,5	1,2	17	8÷13	100	6	6	6
62223					1,3	19	12÷25				
62181	175	44	18	9,5	1,8	21	19÷60	145			
62224*	230	50	24	11	2,2	75	40÷100	270			
62225*	330	70	27	13	2,9	80	85÷200	420			

*These models do not have spring for the confort of the user

INTERNAL BENT



DIN 5256 45°

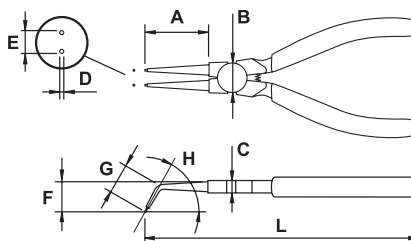

COD	L	A	B	C	D	E	F	G	H	mm	gr.		
62226	150	28	16	9,0	1,3	15	16	15	50°	8÷13	100	6	6
62227						16				12÷25			
62180	170	33	18	10,0	1,7	50	20	17	90°	19÷60	150	6	-
62228*	215	35	25	11	2,1		24	24		40÷100	270		
62229*	300	48	28	13	3	75	33	33		85÷200	420		

*These models do not have spring for the confort of the user