

POLISHED BIMAT


TECHNICAL SPECIFICATIONS

MATERIAL	Body	Cr-V
	Handles	BIMAT
HARDNESS	General	> 45HRC
	Cutting edge (induction hardened)	55-60 HRC
FINISHING	POLISHED	

COMBINATION



DIN 5745

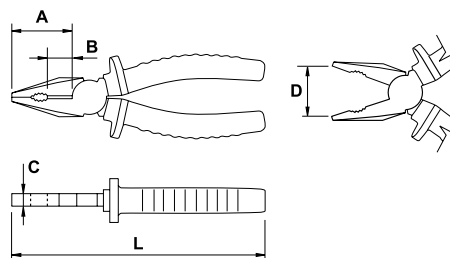


COD	L	A	B	C	D	1	2	3	gr.	4	5
62450	160	36	15	10	38	3	2	1,5	240	6	5
62451	180	38	14	11	41	3,5	2,2		280		
62452	200	43	17	12	50	4	2,5	2	330		

Cr-V

FLAT NOSE



DIN 5745

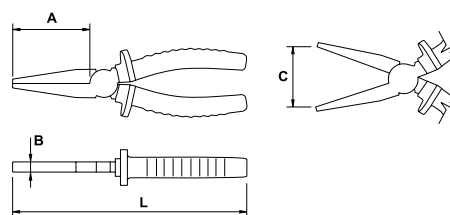


COD	L	A	B	C	gr.	4	5
62453	160	55	8,5	40	150	6	5

Cr-V

ROUND NOSE



DIN 5745

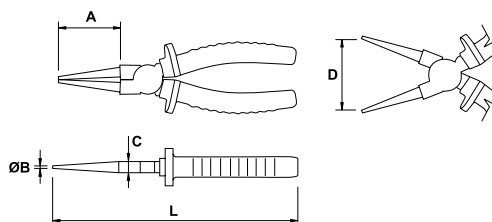


COD	L	A	B	C	D	gr.	4	5
62454	160	41	2	10	39	140	6	5

Cr-V

LONG NOSE



DIN 5745

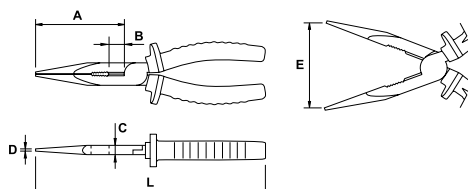

COD	L	A	B	C	D	E	1	2	3	gr.	4	5
62455	160	48	12	9,5	2,3	50	2,5	1,6	1	150	6	5
62456	200	70	14	10,5	2,6	80	3,2	2,2	1,5	190		

Cr-V



Soft
20Kg/mm² - 200N/mm²



Medium
75Kg/mm² - 750N/mm²



Hard
180Kg/mm² - 1800N/mm²



Piano wire
230Kg/mm² - 2300N/mm²